


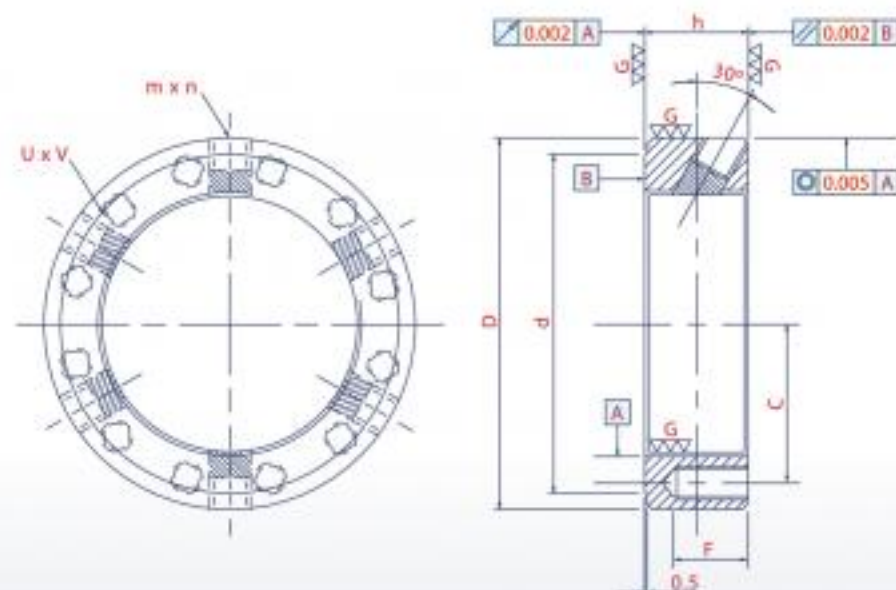

This design differs from the SBL-A in that there are balance adjustment screws added at the trailing surface, making for added convenience in precision adjustment. Balance adjustment screw holes can be fitted with screw-in plugs (option), eliminating high frequency noise and subsequent vibration.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC48° ~ 52°
- Thread Precision: ISO 4H
- Parallelism: 0.002mm
- Edge Bevel: 0.002mm
- Concentricity: 0.005mm

SBL-B

Thread	D	h	d	U x V	C	F	m x n	MAX.Nm	Loosening Torque Nm
SBL-B M20 x 1	38	16	33	M4 x 6	13	10	M5 x 3	4.5	28.9
SBL-B M20 x 1.5					16		M6 x 3	8.0	
SBL-B M25 x 1.5					19		M8 x 3	18.0	
SBL-B M30 x 1.5	45	18	40	M5 x 9	22	12	M8 x 3	18.0	32.4
SBL-B M35 x 1.5	52		47		25				39.2
SBL-B M40 x 1.5	58		52		28				46.1
SBL-B M45 x 1.5	65	20	59	M6 x 9	30	14	M8 x 6	18.0	61.8
SBL-B M50 x 1.5	70		64		33				70.6
SBL-B M55 x 2	75		68		35				88.2
SBL-B M60 x 2	80	22	73	M6 x 12	38	16	M8 x 6	18.0	98.0
SBL-B M65 x 2	85		78		41				127.5
SBL-B M70 x 2	92		84		43				147.1
SBL-B M75 x 2	98	24	90	M8 x 12	46	18	M10 x 6	35.0	152.0
SBL-B M80 x 2	105		96		49				156.9
SBL-B M85 x 2	110		102		53				176.5
SBL-B M90 x 2	120	26	108	M8 x 12	55	20	M10 x 6	35.0	186.3
SBL-B M95 x 2	125		113		58				201.0
SBL-B M100 x 2	130		118		61				220.6
SBL-B M105 x 2	140	28	125	M8 x 12	64	22	M10 x 6	35.0	236.3
SBL-B M110 x 2	145		132		66				252.0
SBL-B M115 x 2	150		137		69				268.1
SBL-B M120 x 2	155	30	142	M8 x 12	71	24	M10 x 6	35.0	279.4
SBL-B M125 x 2	160		147		74				289.2
SBL-B M130 x 2	165		152		78				313.7
SBL-B M135 x 2	175	32	160	M8 x 12	80	26	M10 x 6	35.0	352.9
SBL-B M140 x 2	180		165		84				392.2
SBL-B M145 x 2	190		175		86				436.3
SBL-B M150 x 2	195		180						480.4